

SBL 33-12i

12V 33Ah

SBL 33-12i is a high performance battery with 10-12 years lifetime in standby service or more than 400 cycles at 50% depth of discharge in cycle service.


☆ SPECIFICATION

● NOMINAL VOLTAGE	: 12V
● NOMINAL CAPACITY(20 hr)	: 33Ah
● DIMENSIONS	
TOTAL HEIGHT	: 172 mm (6.77 inches)
CONTAINER HEIGHT	: 159 mm (6.26 inches)
LENGTH	: 195 mm (7.68 inches)
WIDTH	: 130 mm (5.11inches)
● WEIGHT	: APPROX 10.2Kg (22.5 lbs)
● CONTAINER MATERIAL	: UL94HB ABS
	: UL94V-0 ABS
● INTERNAL RESISTANCE(25°C , 77 °F)	: ~10m
● DISCHARGE CAPACITY UNDER DIFFERENT TEMPERATURES	
40°C	: ~102%
25°C	: ~100%
0 °C	: ~85%


☆ CHARACTERISTICS

● CAPACITY 25°C/77°F	
20hr @ 1.65A	: 33 Ah
5hr @ 5.9A	: 29.5Ah
1hr @ 20.6A	: 20.6Ah
1C @ 33A	: 16.5Ah
● CAPACITY 25°C/77°F	
STANDBY USE	:13.65V±0.15V
CYCLE USE	:14.7V ± 0.3V
● MAX DISCHARGE CURRENT	:330A (5sec)
● MAX CHARGING CURRENT	:9.9A
● SELF-DISCHARGE RESIDUAL CAPACITY	
AFTER 3 MONTHS	:~90%
AFTER 6 MONTHS	:~82%
AFTER 12 MONTHS	:~70%


☆ Discharge Current vs Time

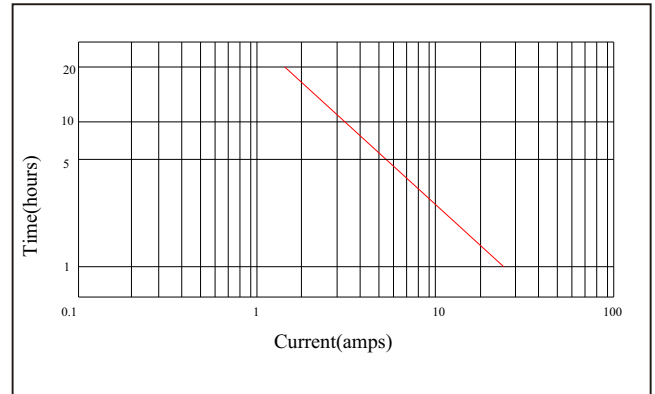

☆ Discharge Characteristics @25 °C (77 °F)

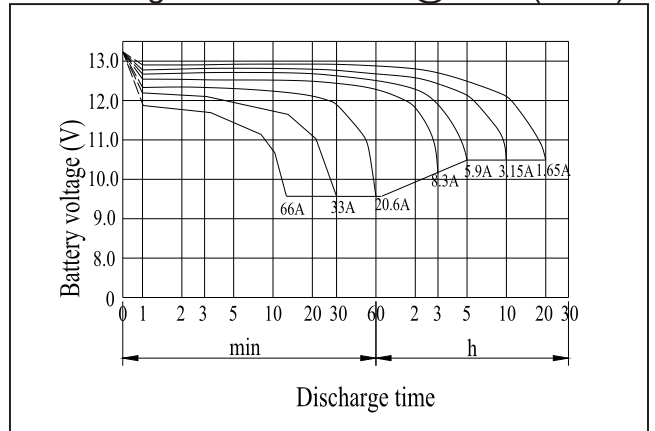

☆ Dimensions

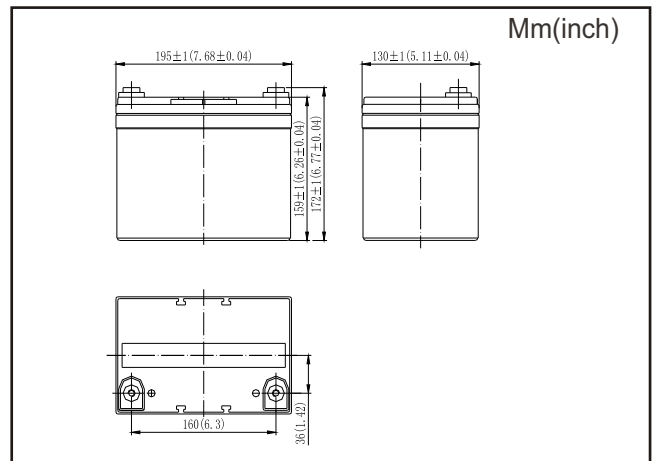

☆ Terminal

